


RECOMMENDED P.C.B LAYOUT

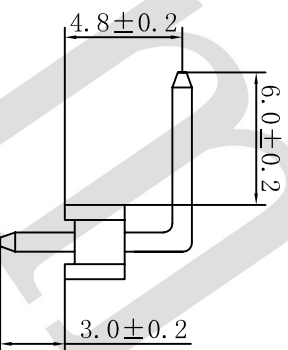

Specification

Insulator Material: Polyesetr, UL94V-0

Standard:P.B.T or PA6T

Contact Material: Brass

Contact plated: Gold Over Nickel

Poles:2~40P

Current Rating : 3Amp

Contact Resistance:20 Milliohms Max

Insulation Resistance : 1000MΩ Min.

Dielectric withstanding Voltage:AC 500V

Operation Temperature : -40°C -- +105°C

TOLERANCE TABLE	
.0	±0.20
.00	±0.10
.000	±0.05

APPROVED:	DATE:	C 深圳市灿科盟实业有限公司 kmtw CHANKEMENG INDUSTRYCO., LTD	TITLE:	210RE-1*XP (6.0/4.8/2.54/3.0)			
CHECKED:	DATE:		CLIENT P/N	/	UNIT	mm	SCALE
DRAWN:	DATE:	FILE NO.	Ckmtw-210-00004	REV.	A		
LXF	2008-04-29						