

**Specification**

Insulator Material: Polyesetr, UL94V-0

Standard:P.B.T or PA6T

Contact Material: Brass

Contact plated: Gold Over Nickel

Poles:2~40P (Double)


Current Rating : 3Amp

Contact Resistance:20 Milliohms Max

Insulation Resistance : 1000MΩ Min.

Dielectric withstanding Voltage:AC 500V

Operation Temperature : -40 °C -- +105 °C

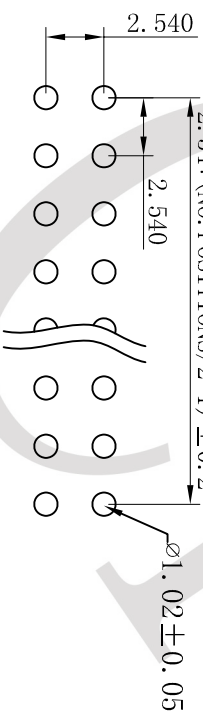

PCBLAYOUT

未注公差表

X.X	±0.2
X.XX	±0.10
X.XXX	±0.050

核准:	日期:	<b>C</b> 深圳市灿科盟实业有限公司 km tw CHANKLEMENT INDUSTRYCO., LTD
业务:	日期:	
制图:	日期:	品名规格: 210R-2*XP (6.0/2.54/1.5/3.0)
L Y F	2008-04-11	客户料号: /
		单位: mm 比例: /
		图纸编号: Ckmtw-210-00003 版本: A