

SPECIFICATION:

Current Rating : 1A

Dielectric Withstanding: AC 500V

Contact Resistance : 20mΩ Max.

Insulator Resistance : 5000MΩ .


Operating Temperature : -40°C~+105°C

Max Processing Temp : 230°C for 30~60 seconds

Contact Material : Brass

Insulator Material : P.B.T UL94V-0

Contact Plating : Gold plated

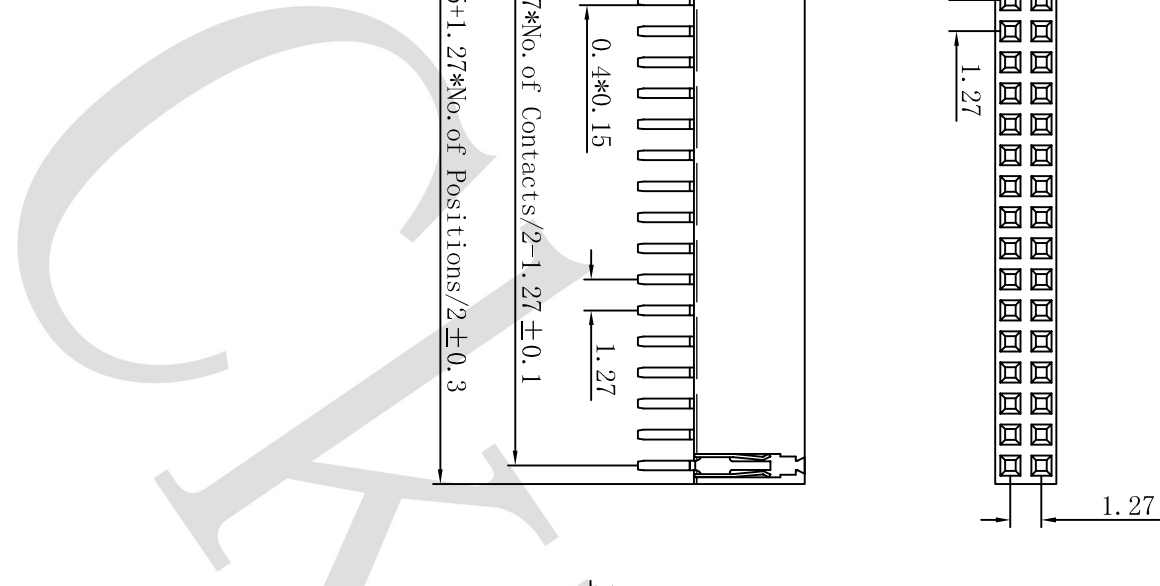

APPROVED:	DATE:	CKM 深圳市灿科盟实业有限公司 CHANKEMENG INDUSTRYCO., LTD			
CHECKED:	DATE:	TITLE: 220-1S-2*XP H=4.3mm			
DRAWN:	DATE:	CLIENT P/N	/		
LYF	2008-04-29	UNIT	mm	SCALE	free
		FILE NO.	Ckmtw-220-10001	REV.	A

TOLERANCE TABLE

.0	±0.20
.00	±0.10
.000	±0.05